

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 21 TOWNSHIP 14 RANGE 2

DATE: 11-7-07

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison set



METHOD OF ESTABLISHMENT: County: 1-31-05

IN. S.P.C. E ZONE NAD '83

NAME: 14022101

N: 488506.0177(m)

E: 43377.1500(m)

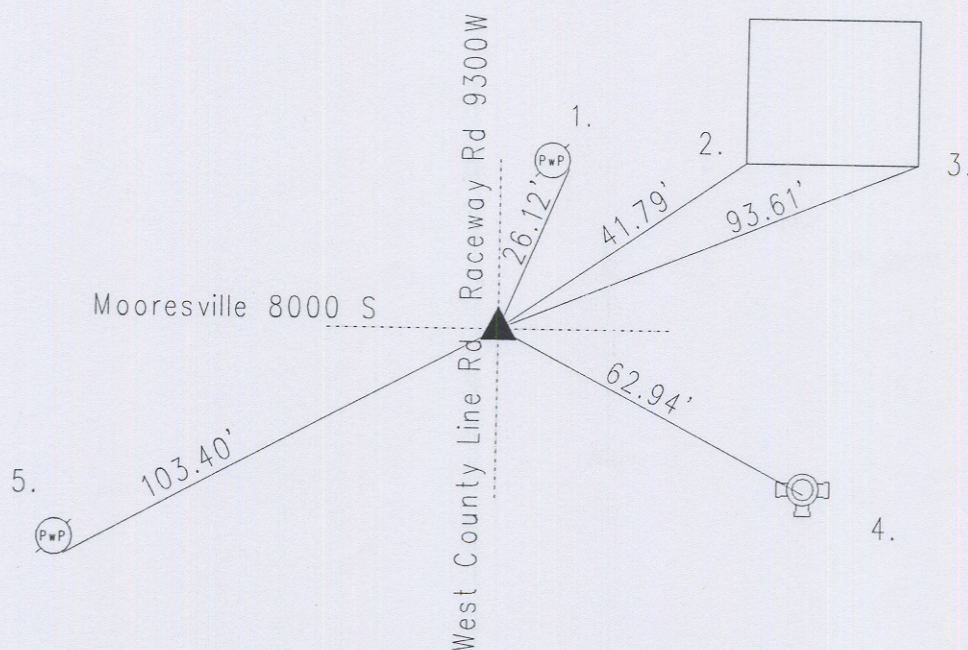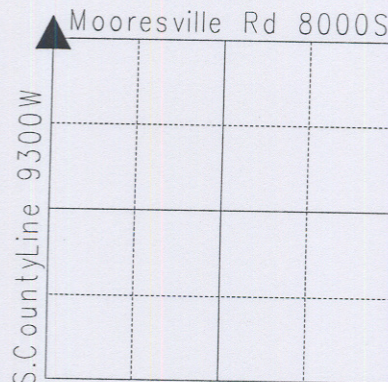

Original post set 1820 by Laughlin with witness: 14" beech N 3 W 12 links, 12" dogwood S 10 E 23 links per Marion County Atlas pg. 1. Smith 1866, surveyed but no mention of monuments nor witness. 8-23-67 Bookedis called 3/4" iron pipe. 10-23-74 McLand called same. 7-8-85 Wilcoxon called PK nai. 6-30-86 Greene called same. Excavated 6-5-91 Harrison set in position of 1" iron pipe 30" long. No stone found. Re-tied 3-8-96 by Wilcoxon. Re-tied 9-21-00 by Wilcoxon. Re-tied 1-31-05 by Kiste. Re-tied 11-7-07 by Wilcoxon and Harrison destroyed by construction and survey mark nail set.

14022101

REF.	DISTANCE	DESCRIPTION
1.	26.12'	Mag nail w/bw F PwP#48-771VA 12"up
2.	41.79'	SW corneer of Address #9250 siding
3.	93.61'	SF corner "
4.	62.94'	Top nut of fire hydrant.
5.	103.40'	Mag nail w/bw SF PwP#210-771VA 3"up